


DSSP9001 Security Tyre Killer

Lock by expansion bolts

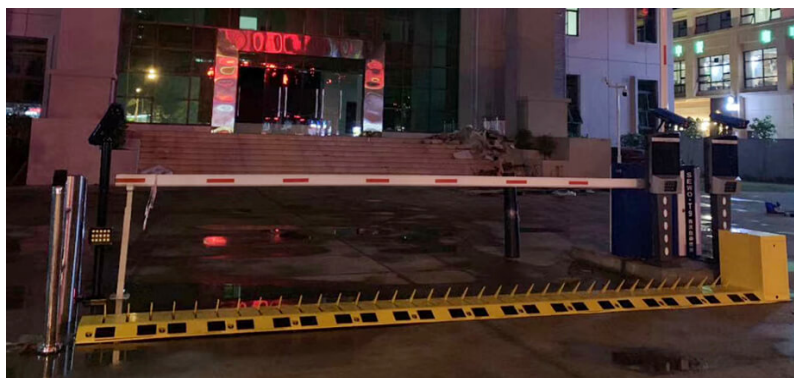


- ◆ Uni-directional & Bi-directional types for high-level anti-terrorism and security.
- ◆ Easy install/maintain, lock by expansion bolts, built-in wiring pipe.
- ◆ Fast lifting speed, 1-2s for rise, 1-2s for up.
- ◆ It can be easily integrate with IR, loop detector, barrier gate, security bollards and road blocker, or other access control devices.
- ◆ A3 Steel body, solid and enduring structure, low noise.
- ◆ The body surface and control center with spray paint for outdoor use, waterproof and rust protection.
- ◆ Axis design for disassembly makes it easy to exchange actuator.
- ◆ In case of emergency, the spikes will support manually rise/drop.

Specifications


| | |
|------------------------------|---|
| Model No. | DSSP9001 |
| Brand | Daosafe |
| Rising Time | 1-2s |
| Dropping Time | 1-2s |
| Dimension-Length | 1m-6m (On request) |
| -Width | 550mm (Uni-directional) 800mm (Bi-directional) |
| -Height(Dropping) | 80mm |
| Height of spikes(Rising) | 120mm (Uni-directional) 80mm (Bi-directional) |
| Thickness of spikes | 10mm |
| Thickness of panel | 12mm |
| Axis | φ25mm,45#steel-solid |
| Surface Color (Customizable) | Green/Red/Yellow |
| Color of Reflective Tape | Yellow/Black/White |
| Bracket, Spikes | 2 layers spray paint |

| | |
|--------------------------|---|
| Actuator | Single (Uni-directional) Double (Bi-directional) |
| Control System | Single-Chip Microcomputer Controller |
| Control Center | Spray paint(Outdoor use) |
| Remote control distance | 100m |
| Wire switch | Optional |
| Manually Rising/Dropping | Yes |
| Power Supply | 220VAC |
| Power Consumption | 220W (Uni-directional) 400W (Bi-directional) |
| Ambient Temperature | -40°C ~ 55°C |
| Traffic light linkage | Support |

Dimensions

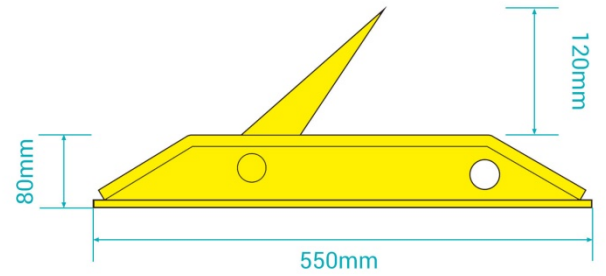

Uni-directional

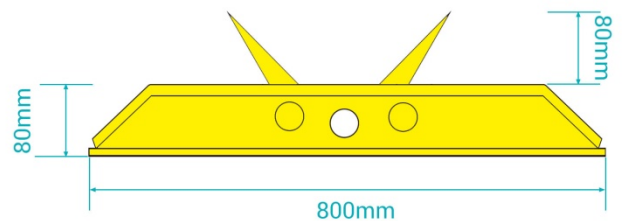

Bi-directional

